

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

Operating device for opening and closing motor vehicle canopies.

Patent Number: EP0480166
Publication date: 1992-04-15
Inventor(s): ZANI BRUNO (IT); ZANI DUILIO (IT)
Applicant(s): ZANI SRL (IT)
Requested Patent: ☐ EP0480166, B1
Application Number: EP19910114738 19910902
Priority Number(s): IT19900002946 19901009
IPC Classification: B60J7/057
EC Classification: B60J7/057
Equivalents: DE480166T, DE69105449D, DE69105449T, ES2067818T, ☐ IT1242092

Abstract

A glass or a sliding cover (1) for canopies held up by rigid side supports (3) is controlled in opening or closing by coupling pairs of pins (10,12) with respective slots (8,9) located on sliding levers (5); the slots (8,9) are engaged with the pins (10) at the front ends of traversing members (11) and the pins (12) on the ends of levers (13) with circular sector gears (14) which are rotated by traversing of carriages (24) having straight teeth (27) and side walls with slots (25) in which are engaged ends of pins (26) constituting a fulcrum of said levers (13). 

Data supplied from the esp@cenet database - I2



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number:

0 480 166 A1

12

EUROPEAN PATENT APPLICATION

5

21 Application number: 91114738.7

51 Int. Cl. 5: B60J 7/057

22 Date of filing: 02.09.91

30 Priority: 09.10.90 IT 294690

43 Date of publication of application:
15.04.92 Bulletin 92/16

84 Designated Contracting States:
AT BE CH DE DK ES FR GB GR LI LU NL SE

71 Applicant: ZANI S.R.L.
via G. Mameli, 10
I-25066 Lumezzane (Brescia)(IT)

72 Inventor: Zani, Bruno
Via G. Mameli, 10
I-25066 Lumezzane (Brescia)(IT)
Inventor: Zani, Duilio
Via G. Mameli, 10
I-25066 Lumezzane (Brescia)(IT)


74 Representative: Lecce, Giovanni
STUDIO NORD BREVETTI Via Suardi, 4
I-24100 Bergamo(IT)

54 Operating device for opening and closing motor vehicle canopies.

57 A glass or a sliding cover (1) for canopies held up by rigid side supports (3) is controlled in opening or closing by coupling pairs of pins (10,12) with respective slots (8,9) located on sliding levers (5); the slots (8,9) are engaged with the pins (10) at the front ends of traversing members (11) and the pins

(12) on the ends of levers (13) with circular sector gears (14) which are rotated by traversing of carriages (24) having straight teeth (27) and side walls with slots (25) in which are engaged ends of pins (26) constituting a fulcrum of said levers (13).

Fig. 5

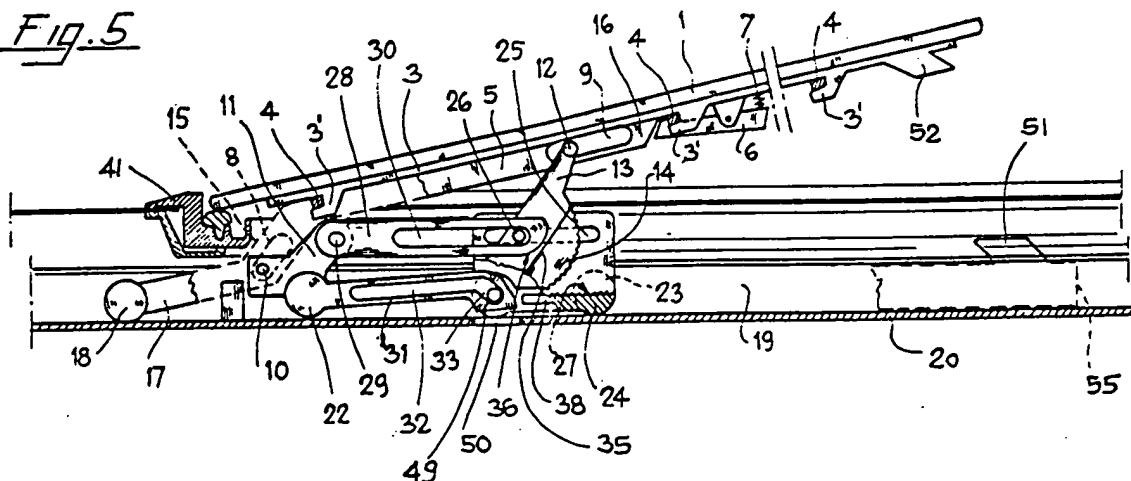

EP 0 480 166 A1

The present invention relates to an operating device for opening and closing motor vehicle canopies consisting substantially of rigid supports constrained to the canopies and on which there are coupling means which engage in an equal number of connections located on sliding levers.

Each of said levers includes a pair of moving fulcrums which engage with the ends of traversing members and transverse lever pivots with circular sector gears. The sector gears mesh with racks integral with carriages which slide when pulled and on which are pivoted said sector gears and are capable of moving longitudinally along slots.

Said traversing members and said carriages are connected together by means of sliding plates whose function is to guide longitudinally and in rotation the movement of said circular sector gears during raising and/or lowering and traversing in opening and/or closing of the canopies, all with dragging movement and coupling, preferably but not in a limiting manner, with paired helical cables using a geared system preferably with reduction of revolutions and operated by a folding crank or an electric motor.

Openable canopies applied or applicable in first or second installation on automotive vehicles in general are substantially equipped with means of opening and/or closing having different structures and configurations depending on the applications, the economical nature required for the product and their function.

In particular many canopies are made with manually operated or electric motor devices which permit raising of the rear part thereof and then sliding backward while opening.

The construction logic contemplates correct positioning of the canopies when open, comfortable ventilation of the passenger compartment of the vehicles while remaining in a substantially valid position from the aerodynamic viewpoint, correct orientation against the flow of apparent wind produced by movement of the vehicle and stable accident prevention orientation.

These advantageous qualities are however obtained with present control devices for positioning and safety by means of very complex members which are costly and subject to failure. Another shortcoming is that the complexity of said devices, and in particular those of raising and supporting the canopies, is such as to limit their effectiveness and allow rather limited opening. In particular, the greatest opening by rearward traversing of the canopies at present possible is limited to approximately one third of the entire space available of the canopy.

Said limitation is of course limiting in respect of the principal purpose of the canopy.

The object of the present invention is to eliminate the aforesaid shortcomings. The invention as

characterized in the claims solves the problem with an automotive vehicle canopy opening and closing device by means of which there are obtained the following results: the canopy body is supported by rigid supports held in position by coupling means which engage with sliding levers which, while performing an oscillating movement during opening and/or closing, remain firmly engaged with the traversing members. Said traversing means are connected to sliding carriages through coupling members and levers for anchoring, guiding and consent or not of rotation. The sliding devices move along a metal shape whose configuration is especially conceived for perfect and long guidance thereof.

The advantages of the present invention lie essentially in that all the operating devices are firmly engaged together forming very compact, rigid and safe structures. The sliding of the traversing means is sufficiently long, within the limitations of the basic shapes, to allow opening certainly greater than half of the space available of the canopy. Said opening can reach even approximately two thirds of said space without thereby detracting from the structural characteristics of strength and stability of the unit.

Other advantages consist of the fact that the operating devices consist of a plurality of components sufficiently limited and simple to make the unit easy to install and remove, convenient to maintain and fundamentally economical enough.

The invention is described and illustrated below in accordance with a preferred but not limiting embodiment thereof with reference to the annexed drawings wherein:-

FIG. 1 shows a cross section of a device corresponding to one side of a canopy when closed.

FIG. 2 shows a cross section of the same device when open.

FIG. 3 shows a partial perspective view of a carriage with traverser of one of the devices.

FIG. 4 shows an example of control of the operating device with reduction gear and helical cables.

FIG. 5 shows a longitudinal cross section of a device in its entirety, and

FIG. 6 shows a partial plan view of the coupling between the sliding carriage and the closing coupling means.

The figures illustrate an opening and closing operating device for the canopies of automotive vehicles in which a sliding glass or cover (1) is held up along its two side edges by rigid supports (3) on which there are coupling serrations (3') which, when the unit is installed, engage with an equal number of connections (4) on shaped sliding levers (5).

At least one of said connections (4) is coupled

with a locking lever (6) by elastic pressure means (7).

Said coupler imposes a rigid and safe constraint between said supports (3) and their respective shaped levers (5) which have two slot configurations (8) and (9) in which are engaged respectively the pins (10) at the front ends of the traversing members (11) and the pins (12) on the ends of the levers (13) with circular sector gears (14).

The shaped levers (5) take on a partially deviated configuration at a point adjacent (15) to the slot (8) to then resume a straight appearance parallel to the end (16) at their end (17) with which is combined at least one cylindrical member or a sliding wheel (18).

Each element (18) runs in side guides included in the central seat (19) of a shape (20) constituting one of the two side guides of the glass or cover (1). Beside said seat (19) in a guide there slides the cylindrical or wheel member (22) of each traversing member (11) while in the central seat (19) also run the cylindrical or wheel members (23) of the carriages (24).

The carriages (24) have side walls with slots (25) in which are engaged the ends of the pins (26) constituting the fulcrum of said levers (13). The sector gears (14) of said levers mesh with racks (27) integral with the carriages and located on their base between said side walls. Each traversing member (11) couples with a corresponding carriage (24) through two parallel levers (28) which on one side have side pins (29) for fulcrums integral with the traversing members and on the other side slots (30) in which are engaged in a sliding manner said fulcrum pins (26) for said levers (13) with circular sector gears (14).

Said traversing members (11) also comprise lower extensions (31) equipped with longitudinal grooves (32) with an end curve (33). In said grooves are engaged pins (34) substantially coaxial with the front wheels or cylindrical bodies (23) of the carriages (24). The parallel levers (28) are positioned at the sides of the levers (13) with circular sector gears (14) and exert a longitudinal guide function thereof because, when the canopy of FIG. 1 is closed, they engage in a sliding manner with the peripheral edges with linear profile (35) of the sides of said levers. The ends (36) of said levers are radiused and allow correct rotating guidance of the levers (13) during the rotary motion which raises and opens of the canopy.

Sliding of the devices described in two directions is achieved preferably but not in a limited manner by means of a serration (37) which engages with a chamber (38) made in the side of said carriages (24). To each serration (37) there leads a flexible spiral cable (39) which extends along a hollow passage (40) in the side of the shape (20).

In the front central zone of the fixed frame (41) of the canopy of FIG. 4 is arranged in a substantially conventional manner a means of control which intervenes on the operating devices which are the object of the present invention.

In particular said means comprises a box (42) with opposing and parallel tubular members (43) in which run the two spiral cables (39) extending respectively to the couplings (37) of the sliding carriages (24) arranged along the fixed side guides (20). The spiral cables (39) run between the box (42) and the slide carriages (24) through said parallel tubular members (43) which join in the hollow passages (40) in the shapes (20) constituting the side guides.

The cables (39) are parallel and mesh in diametrically opposed position with a double helical gear (44) on whose rotation axle is keyed another gear (45) having greater diameter and number of teeth.

A pinion (46) couples with the gear (45) to form a reduction gear which facilitates the sliding operation of the traversing members with reduced speed.

With the central keyed pin (47) of the pinion (46) is constrained preferably but not in a limited manner a conventional crank (48) for manual movement. As an alternative said crank can be replaced by conventional motorized means.

In the opening movement, turning the crank (48) subjects the helical cables (39) to traction. The serrations (37) engaged in the chambers (38) begin to pull the carriages (24) while the traversing members (11) remain temporarily still in their position because the end serrations (49) of their extensions (31) remain engaged in cavities (50) on the bottom of the shapes (20).

Backward movement of the carriages (24) causes return of the closing tie-rods (55), freeing their serrations (51) from those (52) on the ends of the shaped slide levers (5). The closing tie-rods (55) sliding along side grooves (53) of the shapes (20) engage against said carriages (24) on closing. On opening they are recalled by counteracting springs (54) which force them to draw back.

In the above-mentioned release phase the carriages (24) draw back while holding the levers (13) in the closing position. The side levers (28) which run along the straight peripheral edges (35) act on said levers (13), excluding any possibility of rotation around the fulcrum pins (26). Sliding is allowed by the slots (25) of the carriages and by those (30) of the side levers (28). After release the radiused rear ends (36) of the side levers (28) are aligned concentrically with the fulcrum pins (26) while the opposing pins (12) of the levers (13) are pushed to the rear end of the slots (9) on the shaped slide levers (5).

As the carriages (24) continue sliding rearward

the levers with circular sector gear (13), being freed from engagement with the straight edges (35) of the side levers (28), begin to rotate upward pulled by the meshing of the teeth (14) with the rack (27). Their rotation causes rising of the pins (12) and consequently of the levers (5) engaged therewith of the rigid supports (3) and the glass or cover (1). Said raising is limited to the rear part of the canopy because the front thereof with its associated rigid supports conforms to the inclined position taken by the shaped levers (5) whose ends (17) with sliding cylindrical members or wheels (18) remain in adherence with the guides included in the shapes (20).

As it continues sliding backward the canopy raised at the rear is traversed backward. This is possible because the pins (34) which are coaxial with the front wheels or cylindrical bodies (23) of the carriages (24) engage with the curved end part (33) of the longitudinal grooves (32) on the extensions (31) of the traversing members (11). Said engagement causes raising of the end serrations (49) and disengagement thereof from the slots (50) on the bottom of the shapes (20). At this point both the carriages (24) and the traversing members (11) are pulled backward and the glass or cover (1) moves in the same direction while keeping its inclined position until it uncovers a large part of the passage space below.

Thanks to the small size of the devices, their compactness and the sliding which they can perform along the guides (20) the open space left by rearward sliding of the canopy can reach a size equal to or greater than two thirds of its length.

In reversing the traversing motion of the carriages (24) by reversing the motion of the helical cables (39), the glass or cover (1) closes and first slides forward while remaining inclined upward in its part, then, when the traversing members (11) encounter the catches, all the phases described above are completed but in reverse order until complete closing, with the serrations (51) of the tie-rods (55) engaged with those (52) of the shaped levers (5). Finally the fixed frame (41) is configured in such a manner as to constitute, in addition to support for the guides (20), a peripheral sealing zone (55) with gasket (56) and a peripheral channel (57) for collection of any drops of water and in which are made drain holes (58) connected to the conventional water scavenging ducts in vehicles in general.

It is also specified that the present device, illustrated and described in accordance with a preferred and economical embodiment thereof, can be modified in the structure and details without thereby going beyond the scope of the invention. In particular the traversing means with spiral cable (39) can be replaced by other known devices such

as those with continuous cable, worm gear and lead nut with geared branches and so on.

Claims

1. Operating device for opening and closing motor vehicle canopies characterized in that it comprises carriages (24) which slide when pulled and which combine with traversing members (11) by means of grooved side levers (28) in which are engaged the fulcrum pins (26) of the levers (13) with circular sector gears (14) which mesh with racks (27) integral with said carriages. Said circular sector levers (13) and said traversing members (11) are combined with shaped levers (5) for coupling with and support of sliding glasses or covers (1) through moving fulcrums consisting of the coupling of pins (12), levers (13) and pins (10) of the traversing members (11) with respective slots (9) and (8) of the levers (5). The assembly consisting of the carriages (24), traversing members (11) and shaped levers (5) slide in shapes (20) in which are made the associated guides.
2. Device in accordance with claim 1 characterized in that the carriages (24) are equipped with side cylindrical bodies or wheels (23) for sliding and comprise a central fixed rack (27) and are equipped with side walls in which are made longitudinal slots (25) constituting the seats of the fulcrum pin (26) of the corresponding lever (13) with circular sector gear (14) which couples with said rack. Said lever (13) comprises transverse pins (12) for engagement with the slots (9) of the shaped levers (5).
3. Device in accordance with claims 1 and 2 characterized in that the carriages (24) are equipped with side chambers (38) in which engage serrations (37) integral with the ends of the pulling means consisting of flexible spiral cables (39). Said cables slide along passages (40) in the shapes (20) constituting the side guides of the canopy.
4. Device in accordance with claim 1 characterized in that the carriages (24) and traversing members (11) are engaged together either through the combination of the grooved side levers (28) and fulcrum pins (26) of the levers (13) inserted in the slots (25) or through the coupling of pins (34) coaxial with the front cylindrical bodies or wheels (23) of the carriages (24) with the longitudinal grooves (32) along the lower extensions (31) of said traversing members. Said grooves (32) have on

downward deviated end (33) placed opposite the end serrations (49) of the extensions (31) combined and engaging upon closing with slots (50) arranged on the bottom of each guide shape (20).

5. Device in accordance with claims 1 and 4 characterized in that the grooved side levers (28) engage in a longitudinally sliding manner with the peripheral edges with linear profile (35) on the sides of the levers (13) with circular sector gear (14). Said engagement, which occurs during the beginning and the end of the sliding phases of the carriages (24), corresponds to the opening and closing of the sliding glasses or covers (1) and follows a curved path of adherence to the radiused edges of the ends (36) of said levers (28) with a resulting rotation of the levers (13) whose teeth (14) are engaged with the moving rack (27). 10 15 20
6. Device in accordance with claims 1 and 2 characterized in that the shaped levers (5) supporting and moving the sliding glass or cover (1) are equipped with connections (4) which engage in a rigid coupling with serrations (3') on rigid side supports (3) integral with the sliding glass or cover (1) while at least one of said serrations (3') is combined with a locking lever (6) complete with elastic pressure and retention means (7). 25 30
7. Device in accordance with claims 1 and 4 characterized in that upon closing the carriages (24) engage with side tie-rods (55) provided with couplings (51) coupling with an equal number of constraint means (52) on the shaped levers (5). Said tie-rods slide in side seats (53) on the guide shapes (20) and are equipped with retention and return means (54) such as springs. 35 40
8. Device in accordance with claims 1 and 3 characterized in that the traversing means (39) are operated manually or by a motor. 45
9. Device in accordance with claims 1, 3 and 8 characterized in that the traversing means consisting of flexible spiral cables (39) engaged in diametrically opposed position with a helical gear (44) keyed on the same axle of a gear with greater diameter and number of teeth (45) which meshes with a pinion (46) operated by a crank (48) or an electric motor and said reducer unit is included in a box (42) integral with the fixed frame (41) of the canopy and from which extend the opposed and parallel tubular ducts (43) which guide the running of 50 55

said cables (39) which join in the hollow passages (40) in the guide shapes (20).

10. Operating device for opening and closing motor vehicle canopies in accordance with the above claims as illustrated and described and for the specified purposes.

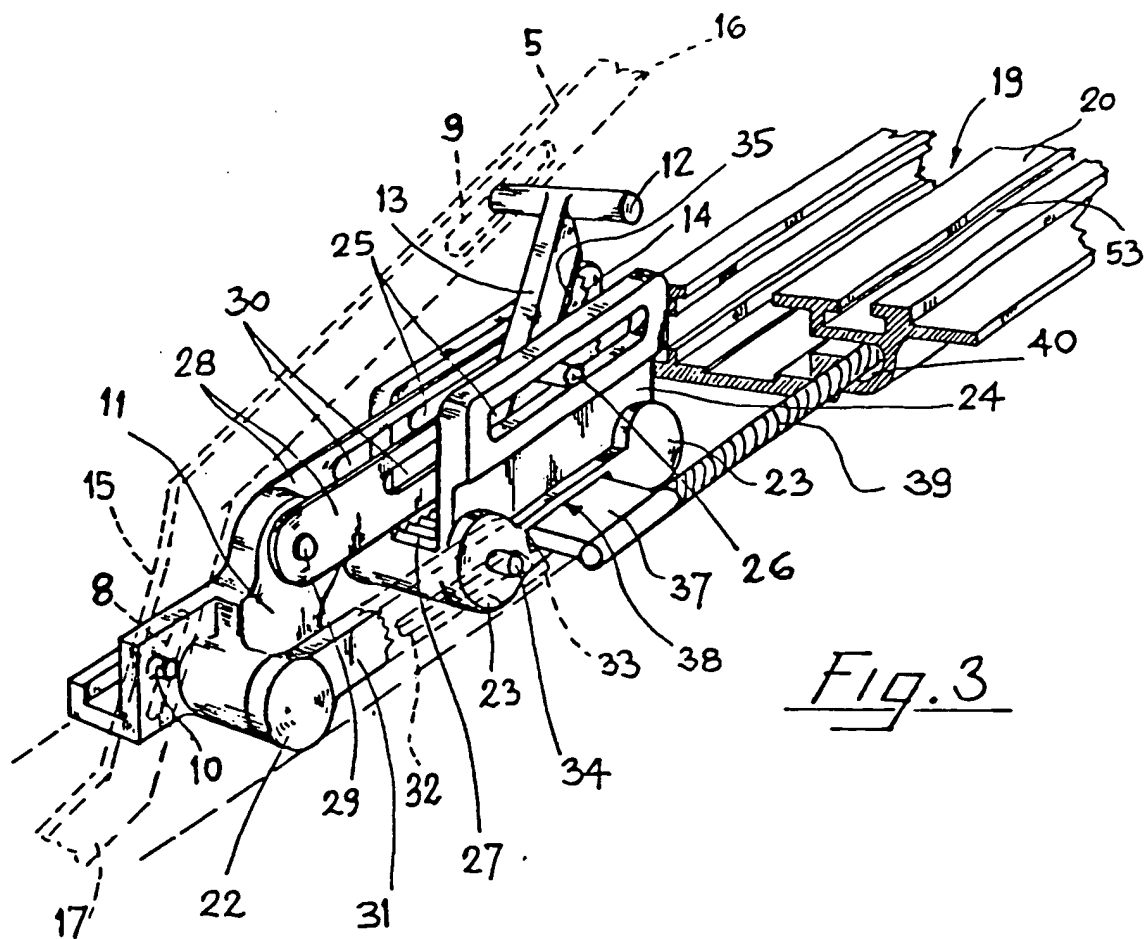


Fig. 3

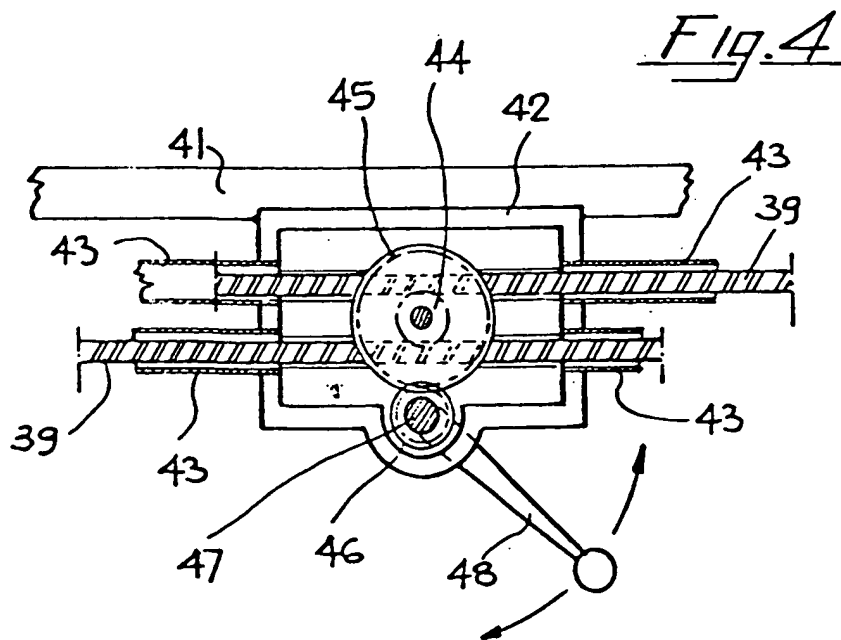


Fig. 4

Fig. 5


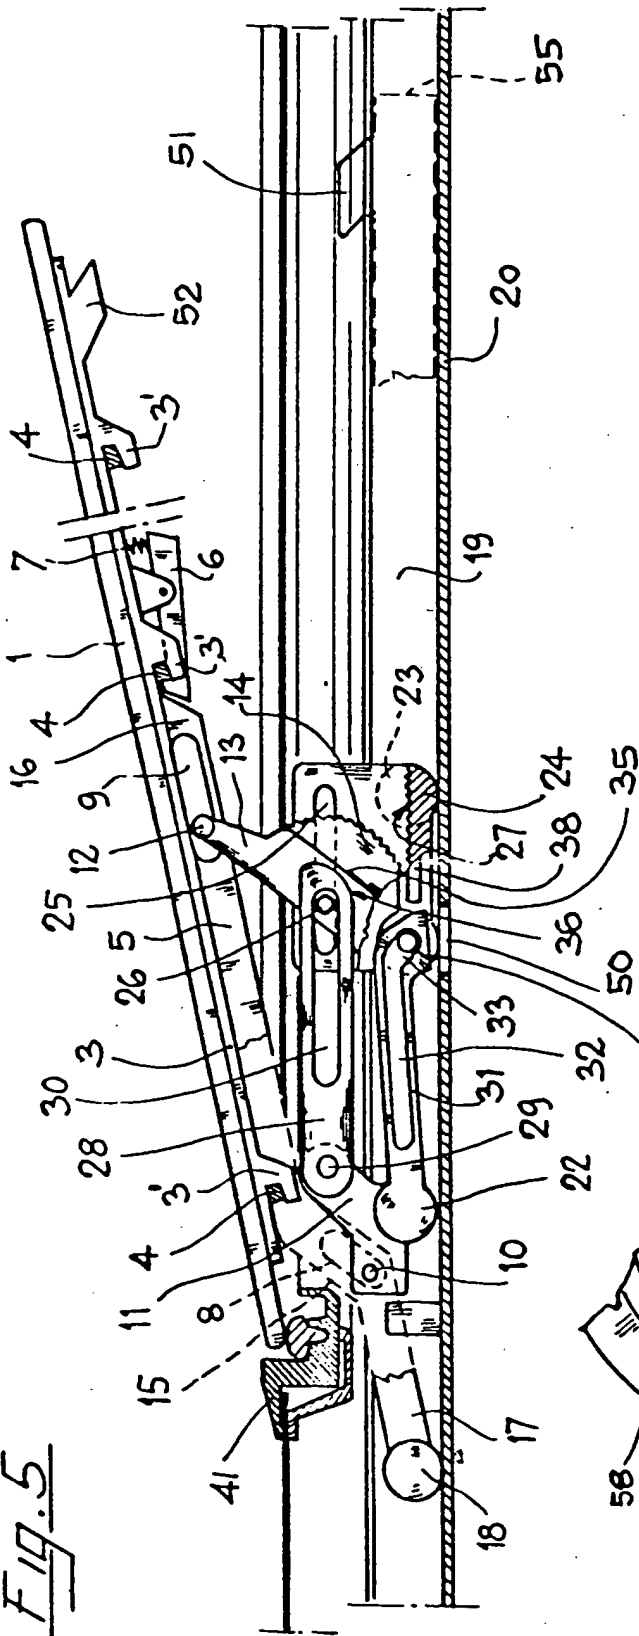


Fig. 6



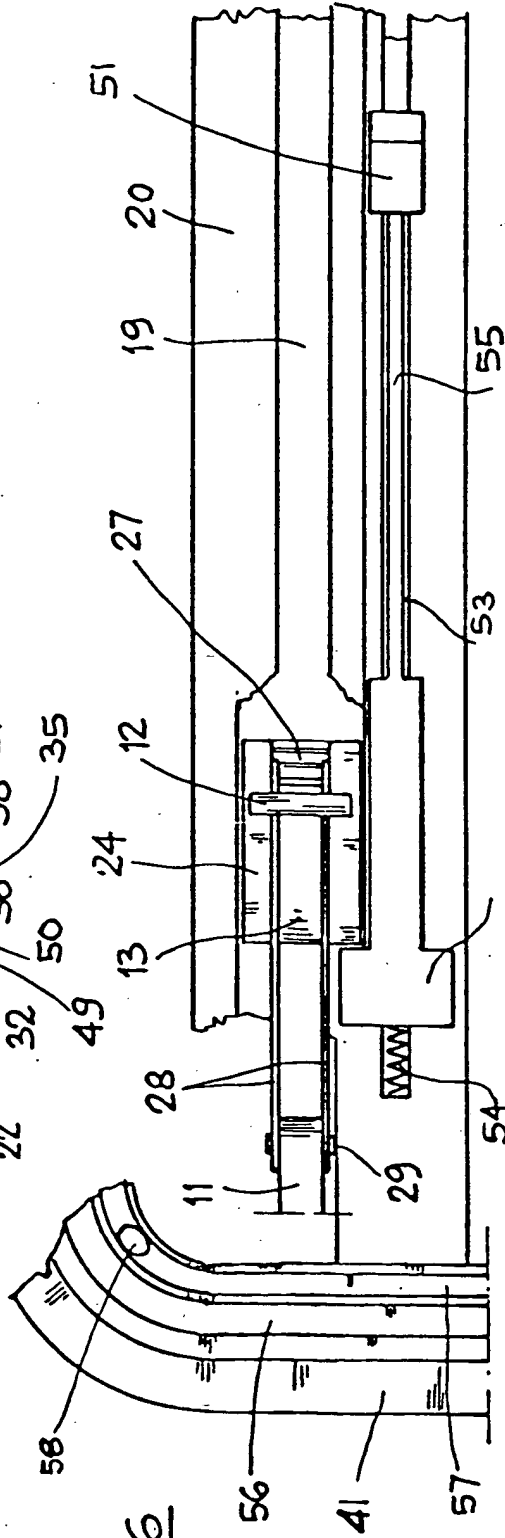

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

DOCUMENTS CONSIDERED TO BE RELEVANT			EP 91114738.7
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
A	DE - A - 3 910 894 (AISIN SEIKI K.K.) * Totality *	1,2,3, 8,9	B 60 J 7/057
A	DE - A - 3 323 030 (KAROSSERIEWERKE WEINSBERG GMBH) * Totality *	1,2,3, 8,9	
A	DE - C - 3 529 118 (ADAM OPEL AG) * Totality *	1,8	
A	DE - A - 3 336 271 (AISIN SEIKI K.K.) * Totality *	1,3,8	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			B 60 J E 05 F
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
VIENNA		05-12-1991	SCHMICKL
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	